




**G4S06506AT**

---

127		

---

- 
- 
- 
- 

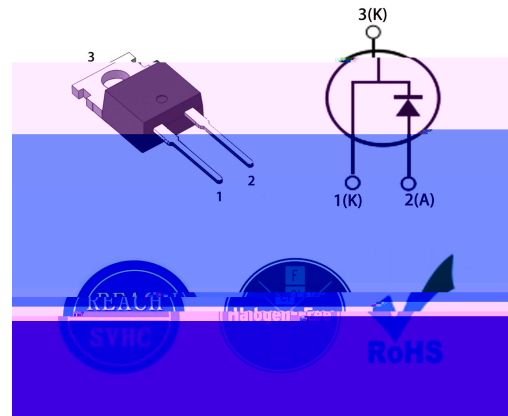


---

- 
- 

(SMPS)


(PFC)

G4S06506AT	TO-220AC	G4S06506AT




	$V_F$	$I_F=6A, T_j=25$	1.68	1.8	V
		$I_F=6A, T_j=175$	2.45	2.8	
	$I_R$	$V_R=650V, T_j=25$	0.07	50	$\mu A$
		$V_R=650V, T_j=175$	0.65	100	
	$Q_C$	$= \int$		-	nC
	$C$	$V_R=0V, T_j=25, f=1MHz$	181	220	pF
		$V_R=200V, T_j=25, f=1MHz$	22.5	25	
		$V_R=400V, T_j=25, f=1MHz$	20.5	21	


1)  $I_F=f(V_F, T_j)$

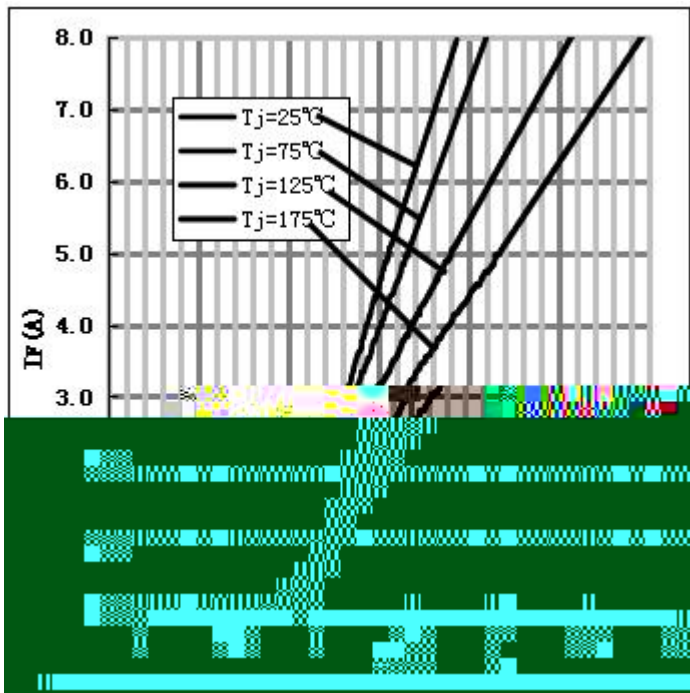


2)

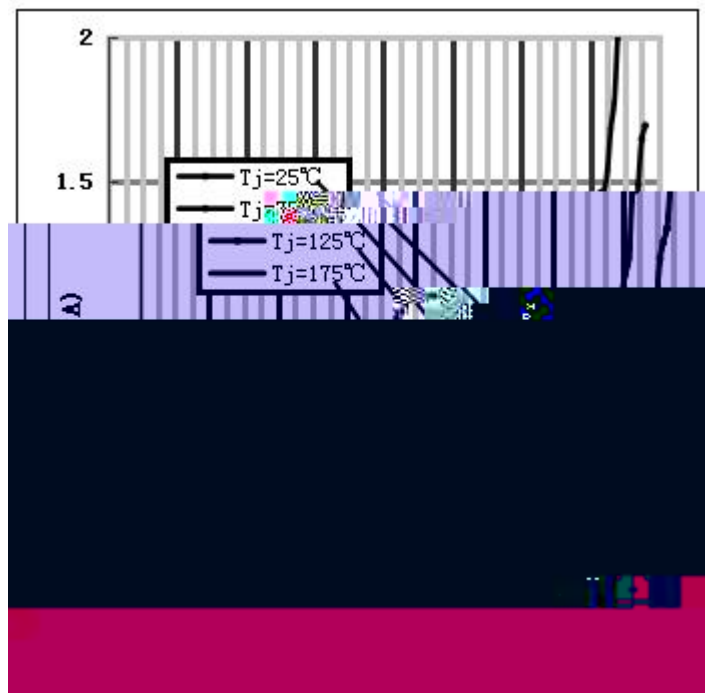


3)

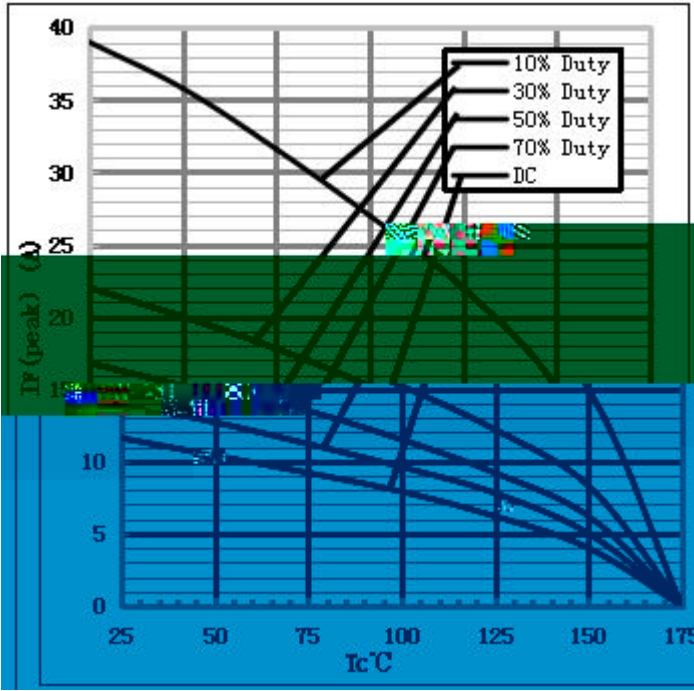

4)

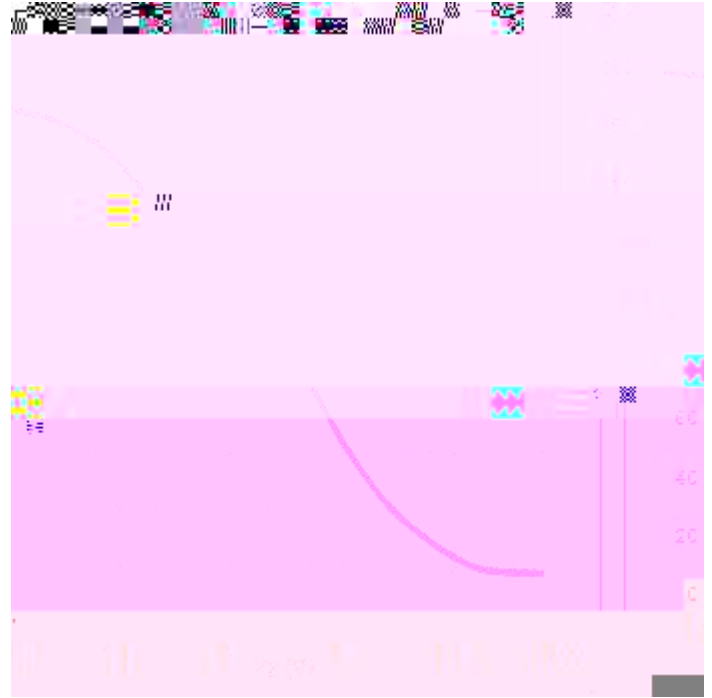

\_\_\_\_\_

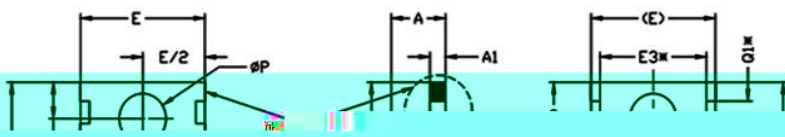

单位: mm

SYMBOL	DIMENSIONS			NOTES
	MIN.	NOM.	MAX.	
A	4.24	4.44	4.64	

ISO9001 2015

2015 9 23

ISO9000

ISO 1987

ISO9001

ISO9001

ISO9001 2015

<http://www.globalpowertech.cn/CompVisualize.asp>

<https://globalpowertech.en.alibaba.com/>

<http://www.globalpowertech.cn/>

