



Features

- Low gate charge
- 100% avalanche tested
- Improved dv/dt capability
- RoHS compliant
- Halogen free package
- JEDEC Qualification

N-channel MOSFET		
BV_{DSS}	I_D	$R_{DS(on)}$
650V	4A	<2.4Ω

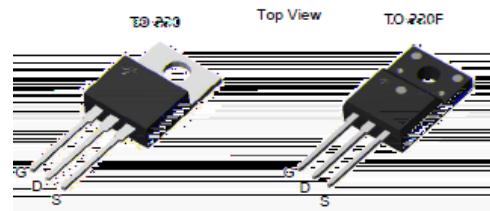

Device	Package	Marking	Remark
TMP4N65Z / TMPF4N65Z	TO-220 / TO-220F	TMP4N65Z / TMPF4N65Z	RoHS
TMP4N65ZG / TMPF4N65ZG	TO-220 / TO-220F	TMP4N65ZG / TMPF4N65ZG	Halogen Free

Absolute Maximum Ratings

Parameter	Symbol	TMP4N65Z(G)	TMPF4N65Z(G)	Unit
Drain-Source Voltage	V_{DSS}	650		V
Gate-Source Voltage	V_{GS}	30		V
Continuous Drain Current $T_C = 25$	I_D	4	4 *	A
$T_C = 100$		2.4	2.4 *	A
Pulsed Drain Current (Note 1)	I_{DM}	16	16 *	A
Single Pulse Avalanche Energy (Note 2)	E_{AS}	242		mJ
Repetitive Avalanche Current (Note 1)	I_{AR}	4		A
Repetitive Avalanche Energy (Note 1)	E_{AR}	9.84		mJ
Power Dissipation $T_C = 25$	P_D	98.4	32.9	W
Derate above 25		0.78	0.26	W/
Peak Diode Recovery dv/dt (Note 3)	dv/dt	4.5		V/ns
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55~150		
Maximum lead temperature for soldering purposes,	T_L	300		

* Limited only by maximum junction temperature

Thermal Characteristics







Parameter	Symbol	TMP4N65Z(G)	TMPF4N65Z(G)	Unit
Maximum Thermal resistance, Junction-to-Case	$R_{\theta JC}$	1.27	3.8	/W
Maximum Thermal resistance, Junction-to-Ambient	$R_{\theta JA}$	62.5	62.5	/W







Electrical Characteristics : $T_C=25^\circ C$, unless otherwise noted



Note :

- Note :


 - Repeated rating : Pulse width limited by safe operating area
 - $L = 28\text{mH}$, $I_{AS} = 4\text{A}$, $V_{DD} = 50\text{V}$, $R_G = 25\Omega$, Starting $T_J = 25^\circ\text{C}$
 - $I_{SD} = 4\text{A}$, $\frac{dI}{dt} = \frac{\mu\text{s}}{\mu\text{s}}$, $V_{DD} = 50\text{V}$, $T_J = 25^\circ\text{C}$, Starting $T_J = 25^\circ\text{C}$
 - Essentially Independent of Operating Temperature Typical Characteristics

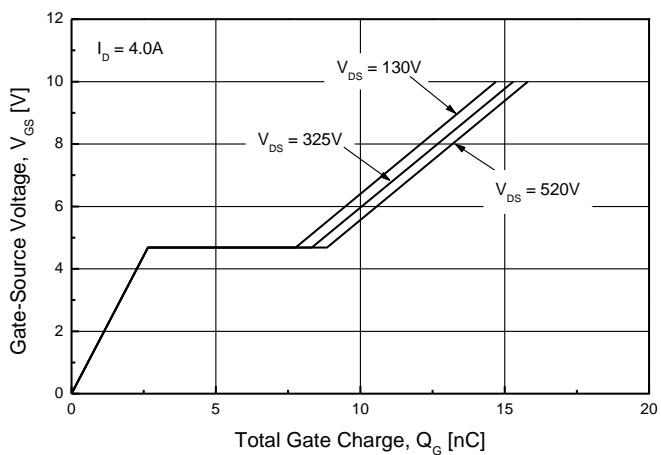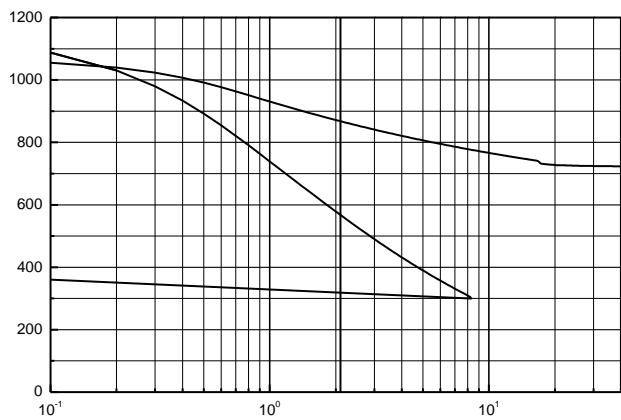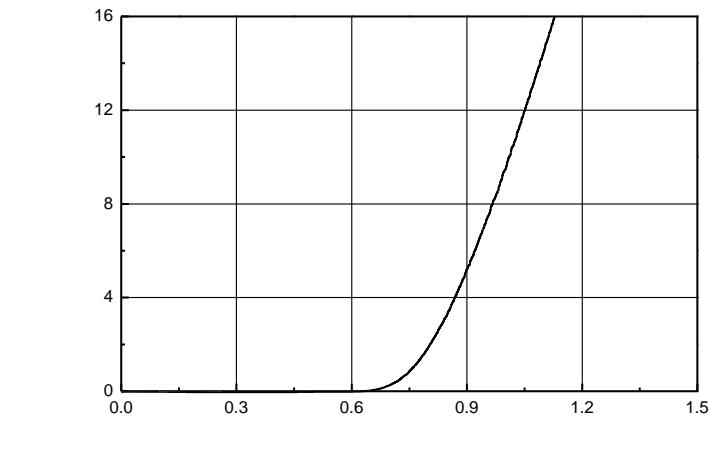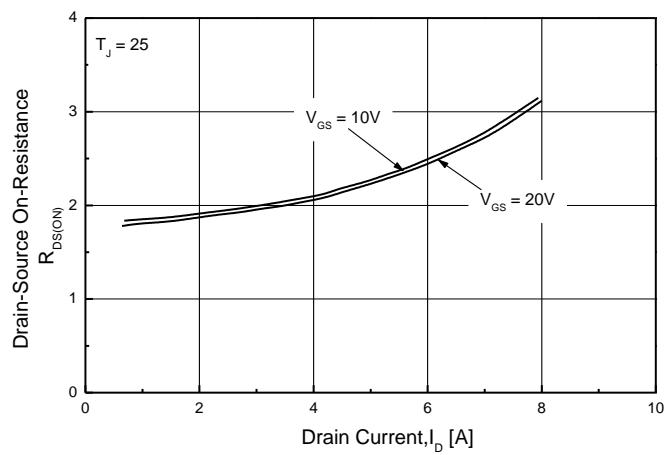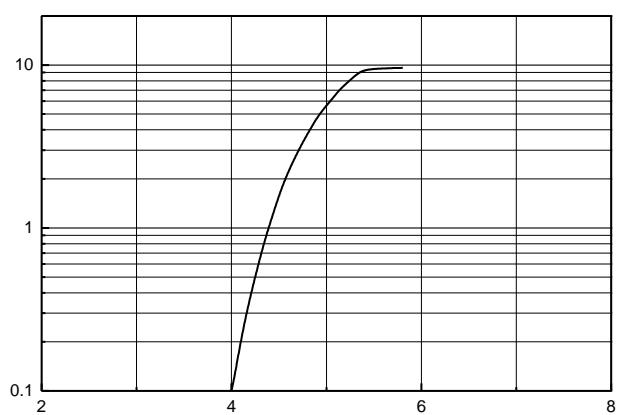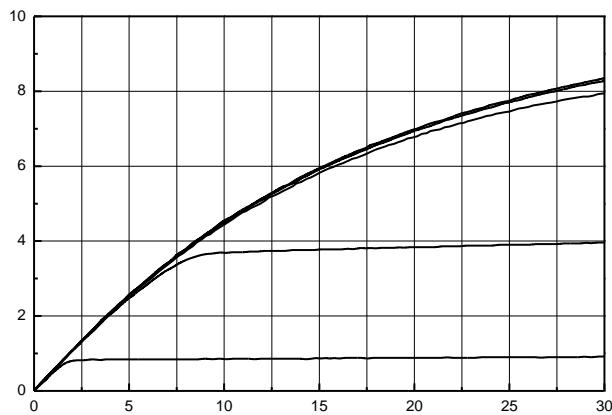

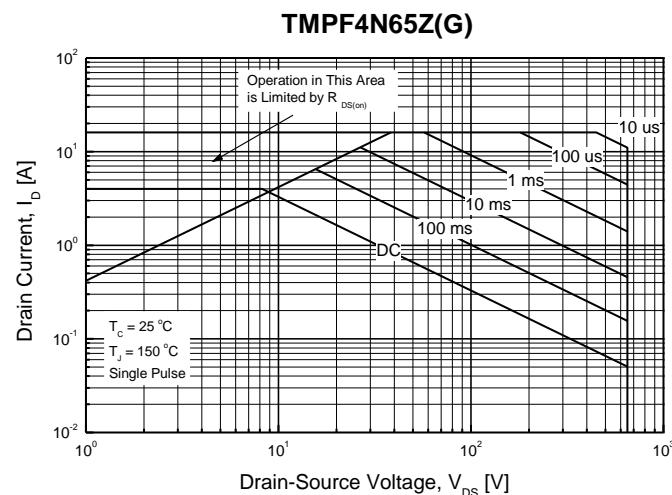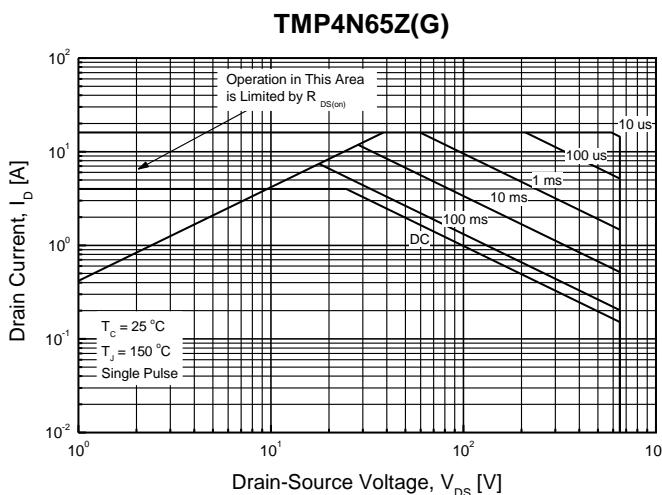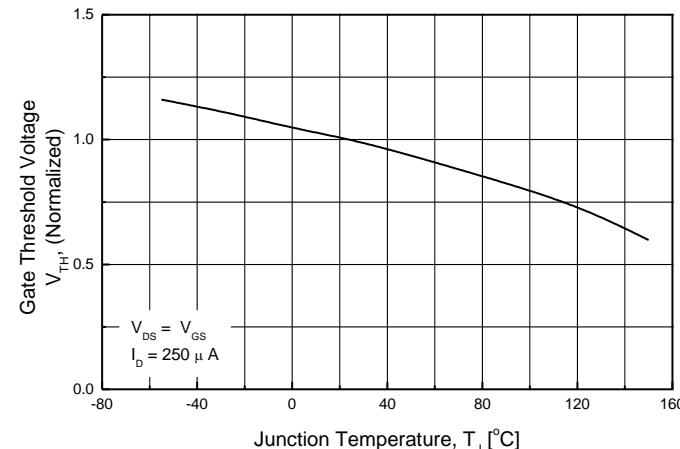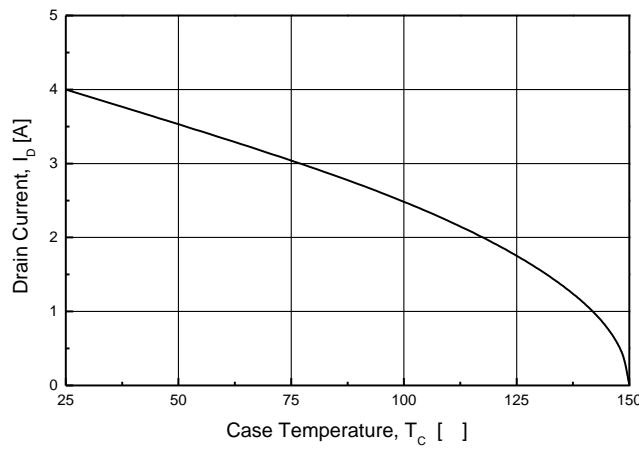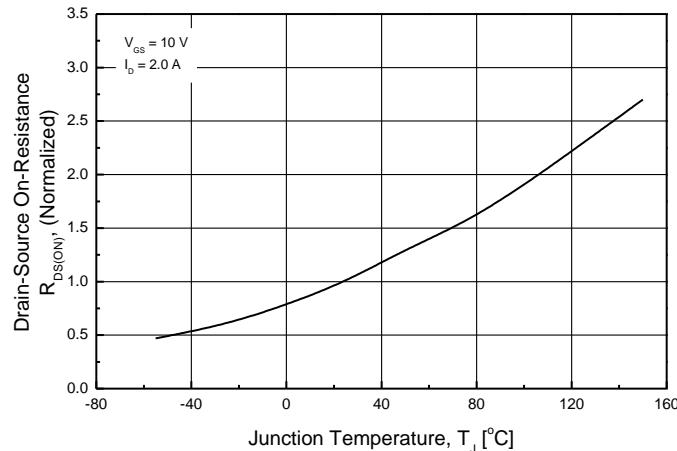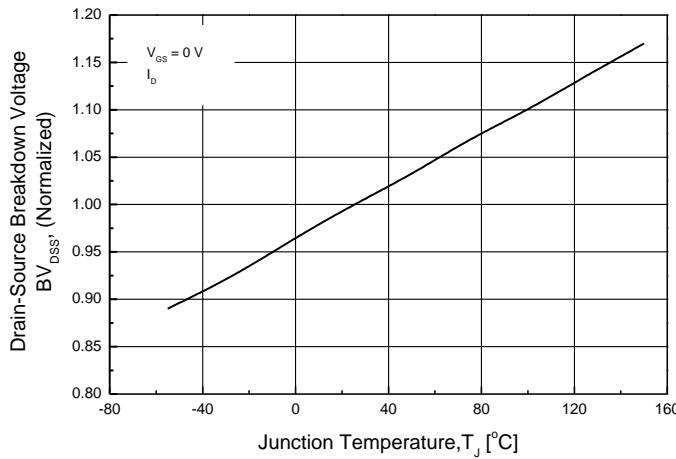

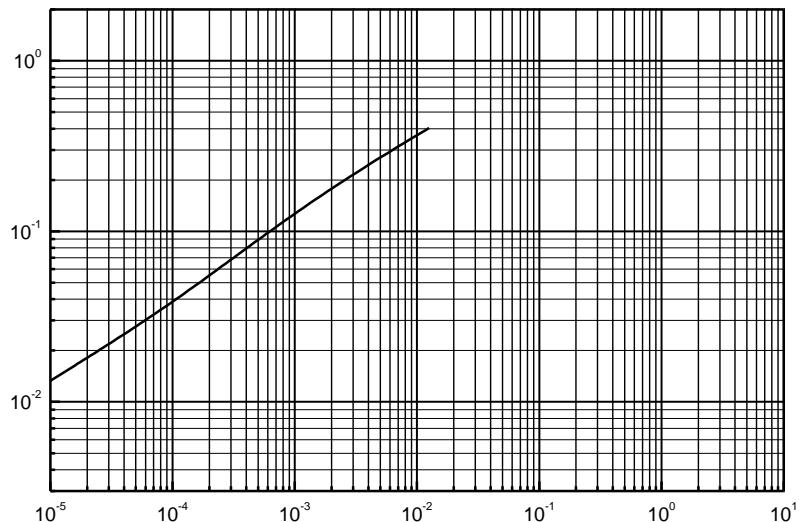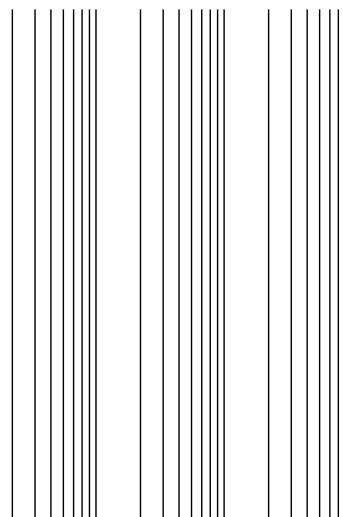TMP4N65Z(G)**TMPF4N65Z(G)**

TO-220AB-3L MECHANICAL DATA

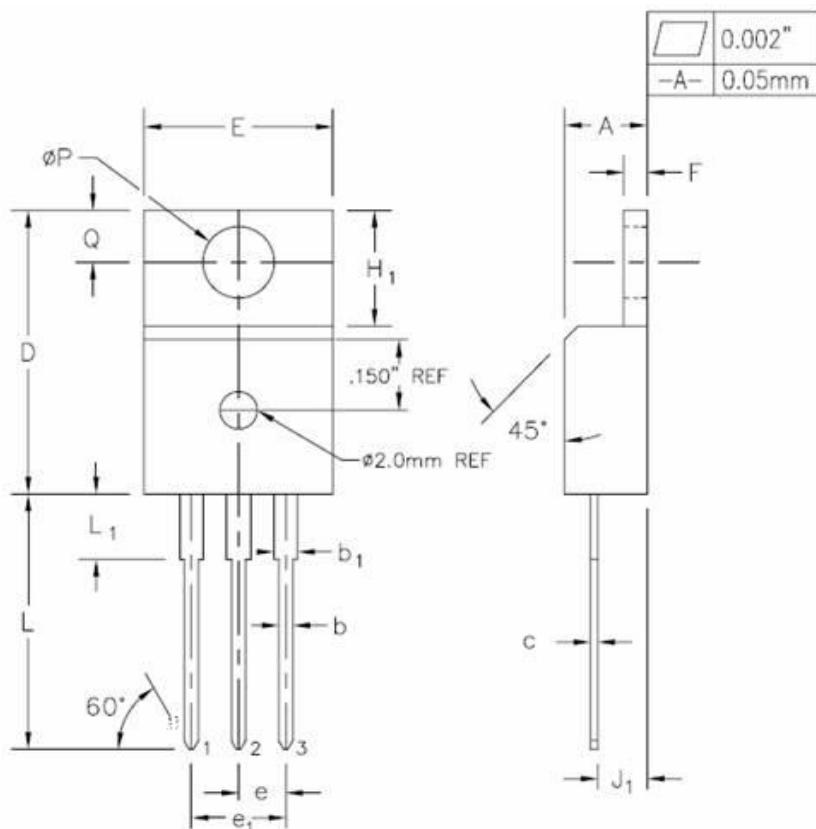

SYMBOL	INCHES		MILLIMETERS		NOTES
	MIN.	MAX.	MIN.	MAX.	
A	0.170	0.180	4.32	4.57	
b	0.028	0.036	0.71	0.91	
b ₁	0.045	0.055	1.15	1.39	
c	0.014	0.021	0.36	0.53	
D	0.590	0.610	14.99	15.49	
E	0.059	0.147	1.50	3.75	
e	0.100	TYP.	2.54	TYP.	
e ₁	0.200	BSC	5.08	BSC	
F	0.048	0.054	1.22	1.37	
H ₁	0.235	0.255	5.97	6.47	
J ₁	0.100	0.110	2.54	2.79	
L	0.530	0.550	13.47	13.97	
L ₁	0.130	0.150	3.31	3.81	
ØP	0.142	0.153	3.78	3.98	
Q	0.100	0.122	2.60	2.84	

TO-220F-3L MECHANICAL DATA

