



Feature

High Speed Power Switching, Logic Level
 Enhanced Body diode dv/dt capability
 Enhanced Avalanche Ruggedness
 100% UIS Tested, 100% Rg Tested
 Lead Free, Halogen Free

Application

Synchronous Rectification in SMPS
 Hard Switching and High Speed Circuit
 DC/DC in Telecoms and Industrial

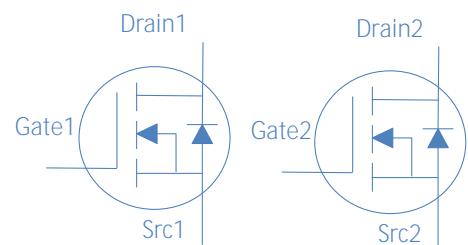



=25°C (unless otherwise specified)

		=25°C		
		=100°C		
		=25°C		
			±	
		=25°C		
		=25°C		°C

				°C/W
				°C/W



