




A A A A A
 A A A
 A
 A A A A A
 A A

			Ω
			Ω

A A A A A A
 A A A A A
 A A A



=25 (unless otherwise specified)

		=25		
		=100		
		=25		
		=25		
		=25		W

		θ		W
		θ		W



=25 (unless otherwise specified)

		μ				
		μ				
		=25				μ
		=100				
						Ω
	fs					
		Open, f=1MHz				Ω

		=50V, f=1MHz				
Reverse Transfer Capacitance						
Turn off Delay Time	d(off)	Ω				
	f					

		$/dt=500A/\mu$				



--	--

Figure 4. Normalized On-Resistance vs. Junction Temperature


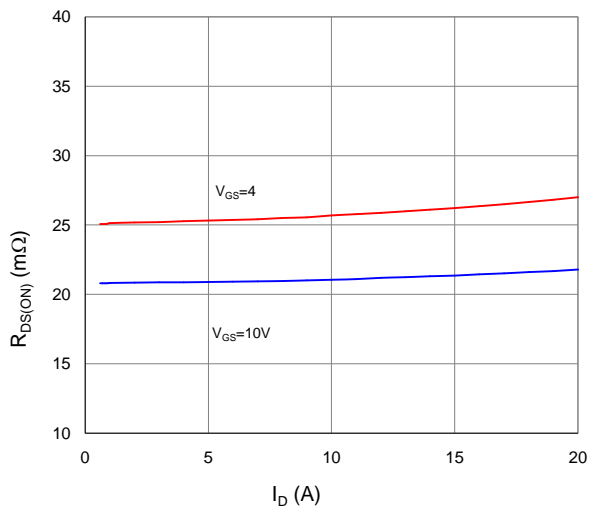


Figure 5. Typical Transfer Characteristics


--	--




te

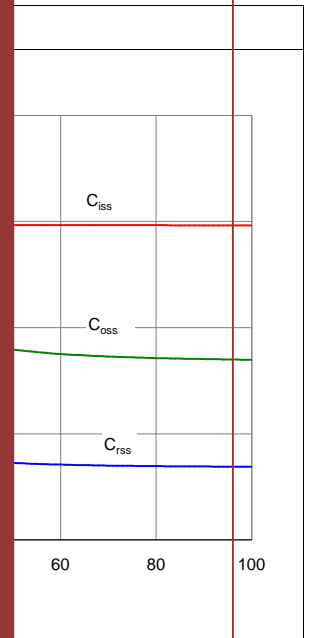



kir

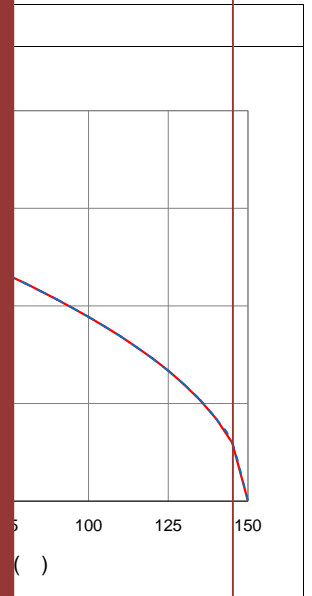


ient

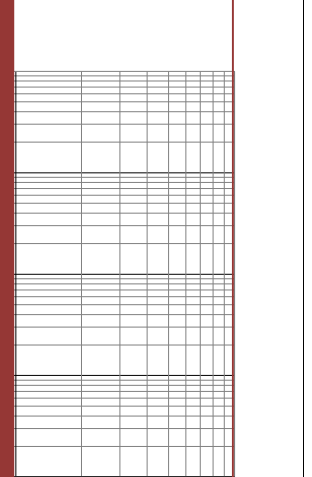

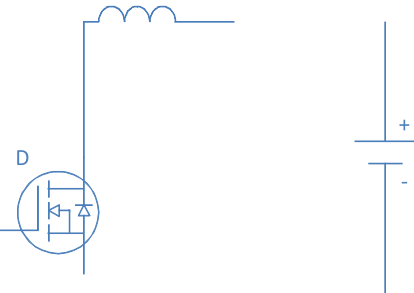
 <p>The diagram shows a circuit with a coil (inductor) at the top, a battery at the bottom right with a '+' sign on the top terminal and a '-' sign on the bottom terminal, and a switch labeled 'D' on the left. The switch is a double-throw switch with two contacts and a central moving contact.</p>	



Top View
[顶视图]



Bottom View
[背视图]

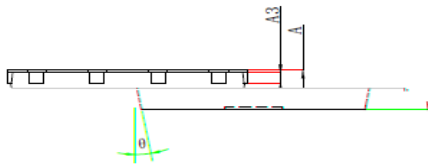

Side View
[侧视图]

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	0.900	1.100	0.035	0.043
A3	0.254 REF		0.010REF	
D	4.680	5.120	0.184	0.202
E	5.900	6.126	0.232	0.241
D1	3.610	4.110	0.142	0.162
E1	3.380	3.780	0.133	0.149
D2	4.800	5.000	0.189	0.197
E2	5.674	5.826	0.223	0.229
k	1.100	1.390	0.043	0.055
b	0.330	0.510	0.013	0.020
e	1.270TYP		1.270TYP	
L	0.510	0.711	0.020	0.028
L1	0.424	0.576	0.017	0.023
H	0.410	0.726	0.016	0.029
θ	0°	12°	0°	12°