




		Ω



=25 (unless otherwise specified)

		=25	
		=100	
		=25	
		=25	
		=25	W

	JC		W
	JA		W



Ω

Open, $f=1\text{MHz}$

Ω

$=67\text{V}$, $f=1\text{MHz}$

Turn off Delay Time

$d(\text{off})$

Ω

f

$\Delta t=600\text{A}/\mu$



--	--

Figure 4. No

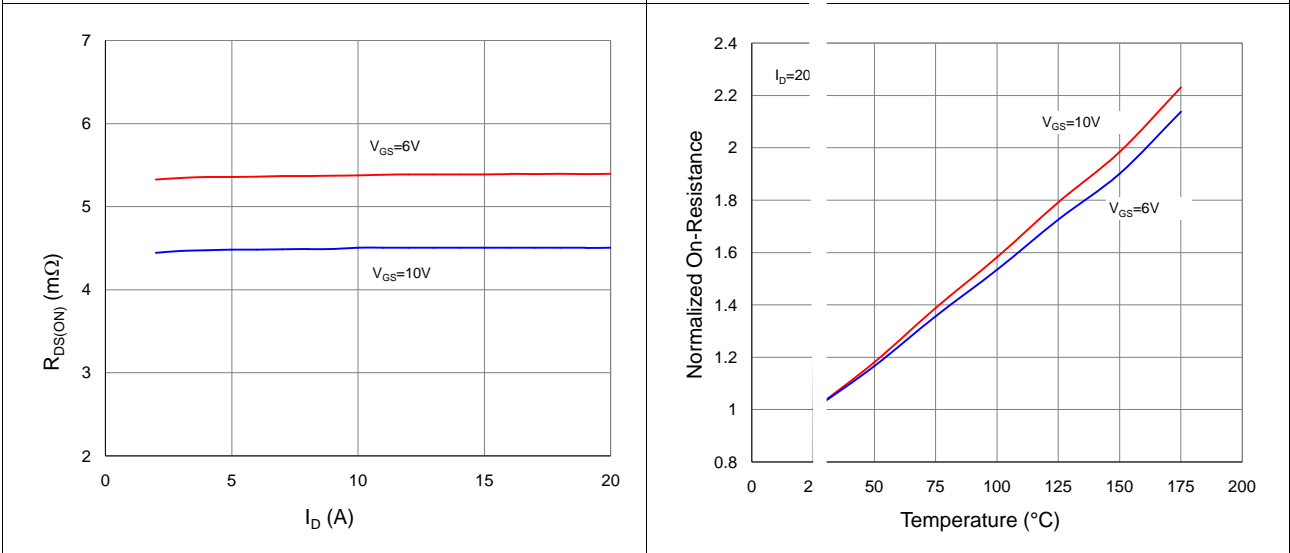


Figure 5. Typical Transfer Characteristics

--	--

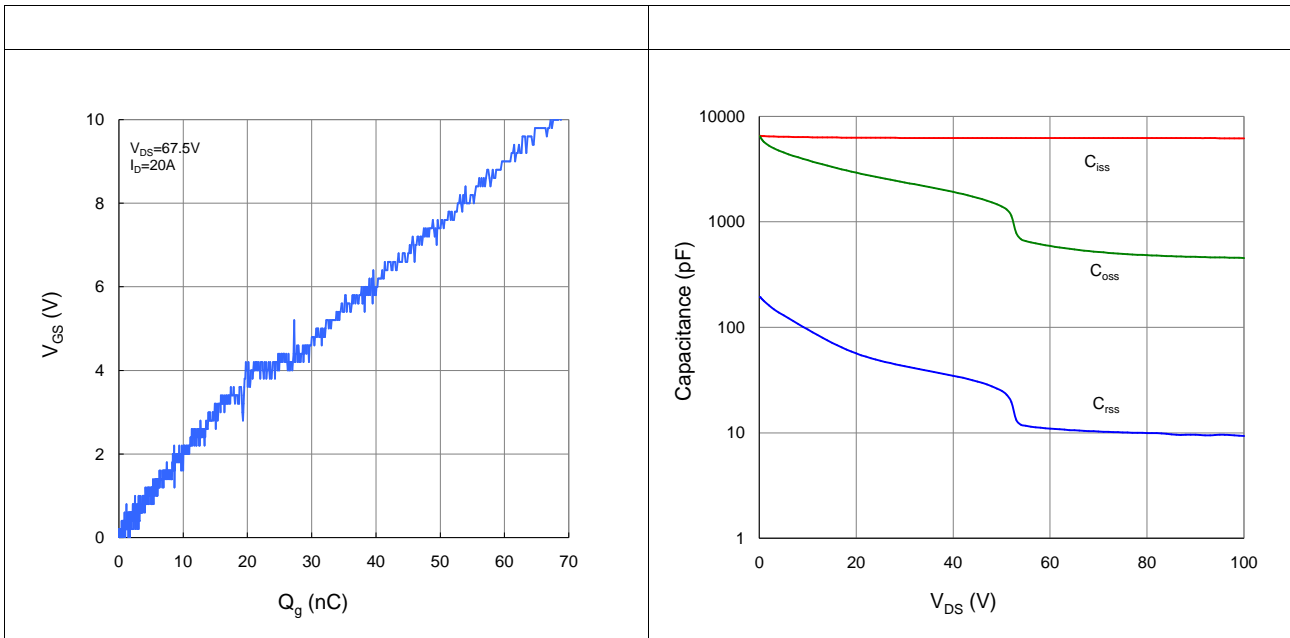


Figure 9. Maximum Safe Operating Area

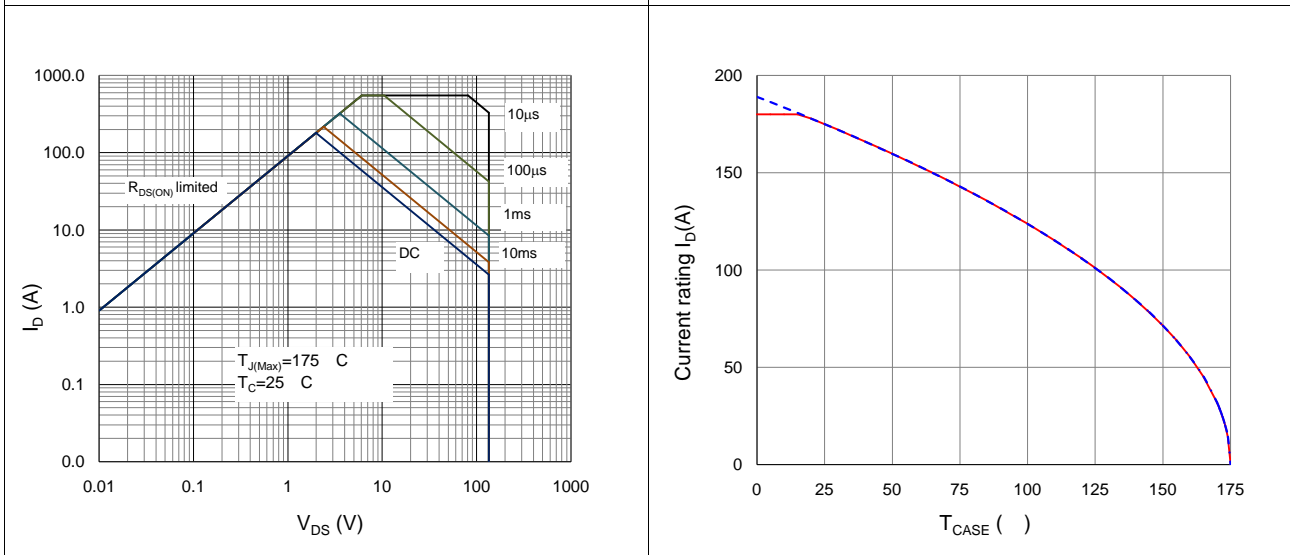


Figure 11. Normalized Maximum Transient Thermal Impedance, Junction-to-Case

