



Feature



- ◇ High Speed Power Switching, Logic Level
- ◇ Enhanced Avalanche Ruggedness
- ◇ 100% UIS Tested, 100% Rg Tested
- ◇ Lead Free, Halogen Free

			Ω
			Ω

Application

- ◇ Load Switches
- ◇ Hard Switching and High Speed Circuit
- ◇ BLDC Motor

TO-252









	θ		
	θ		












		μ				
		μ				
						μ
						Ω
						Ω


		Ω				

		μ				

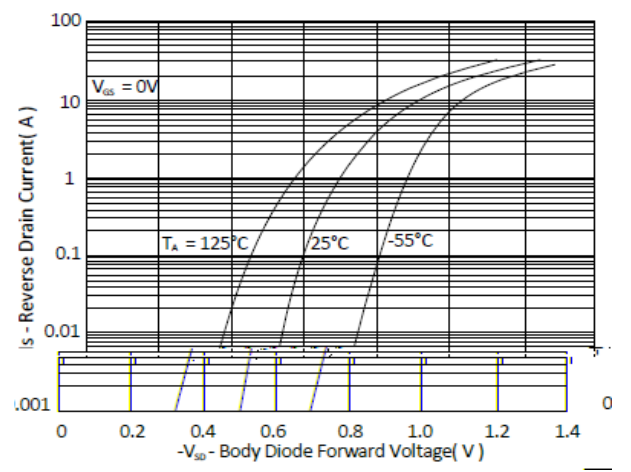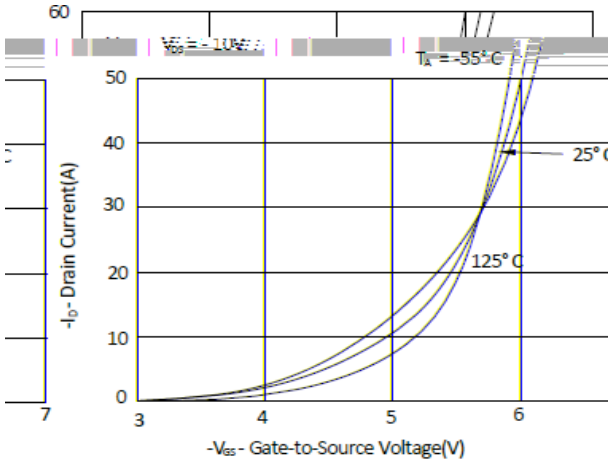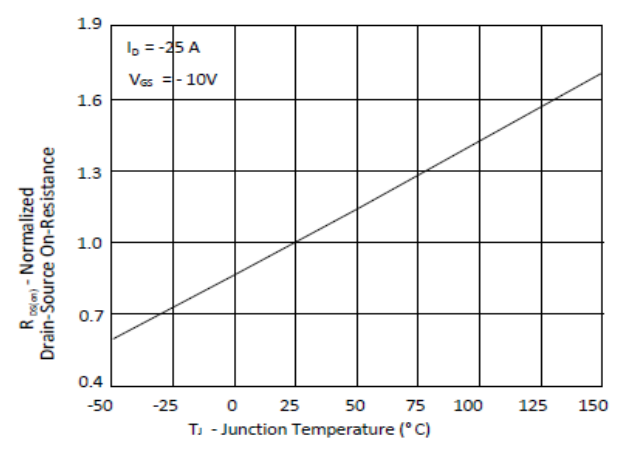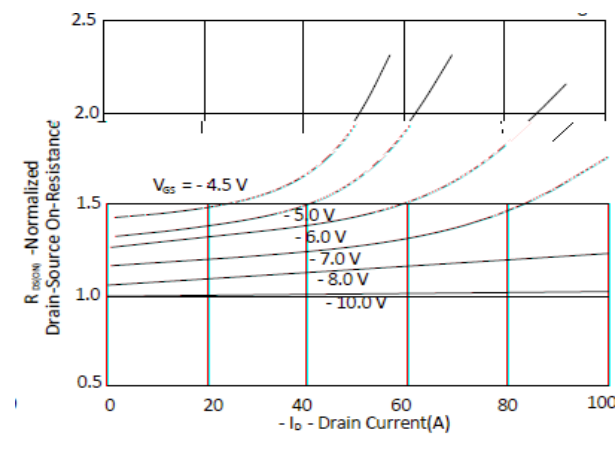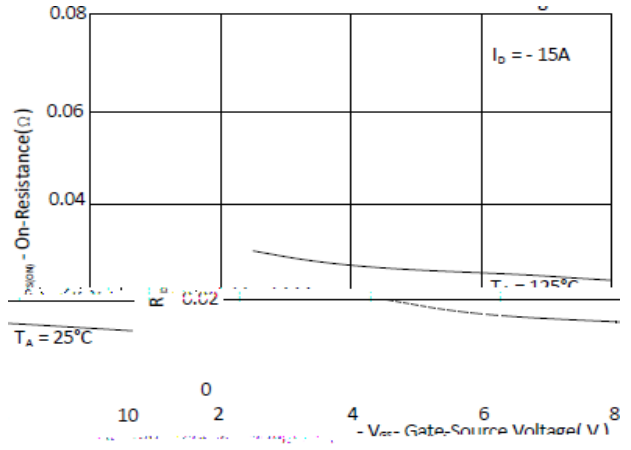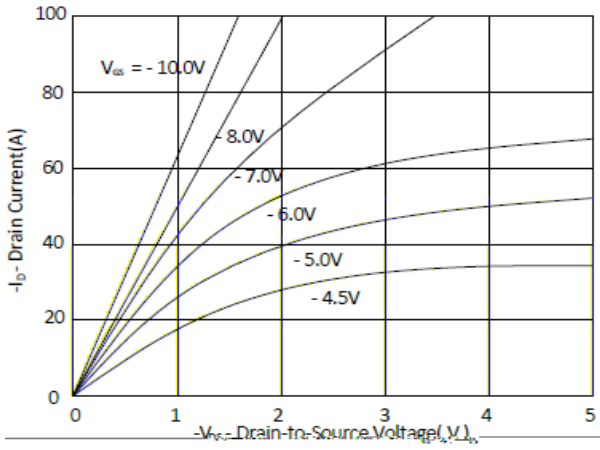

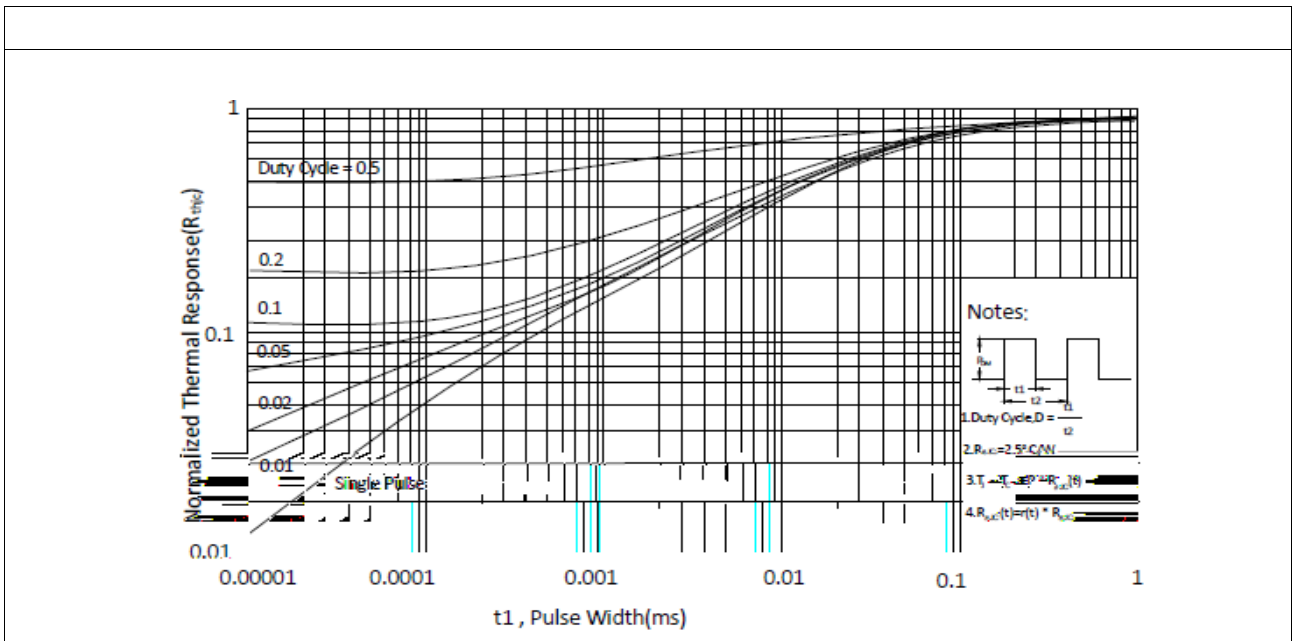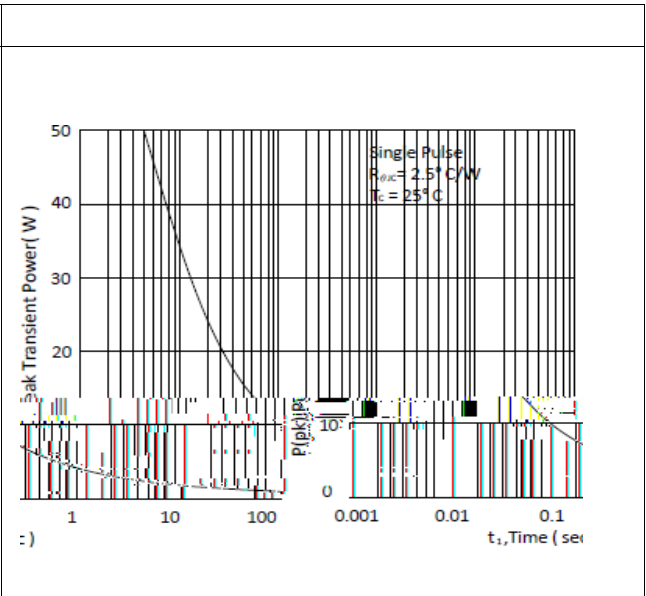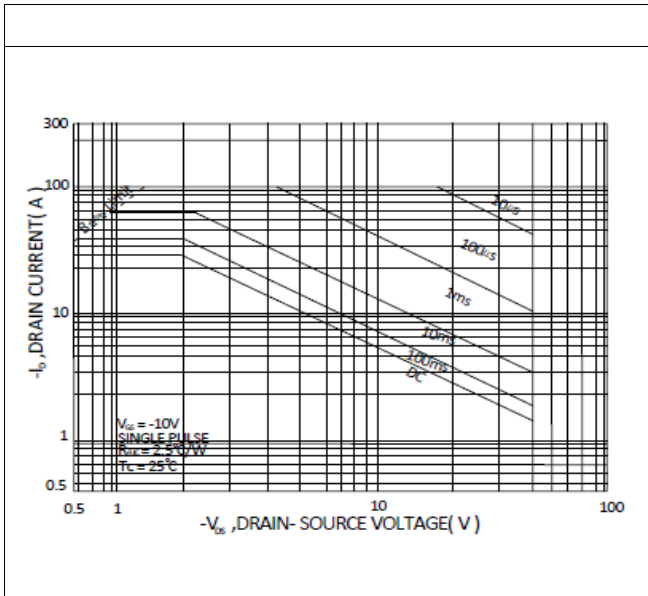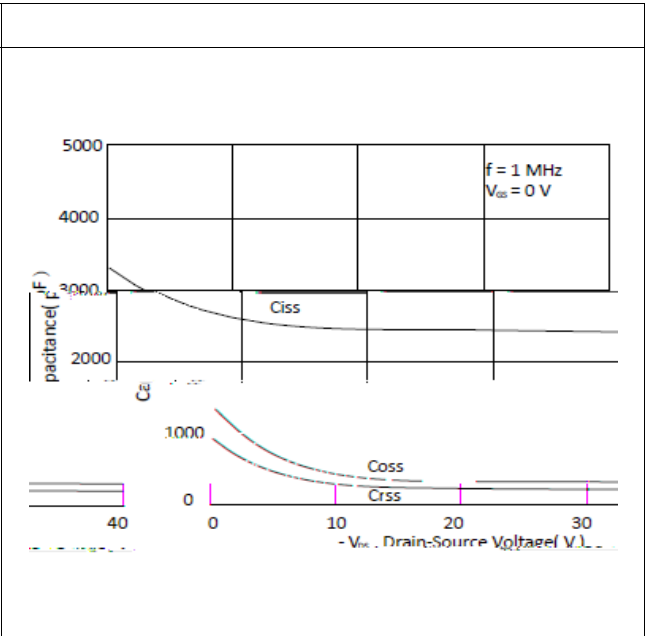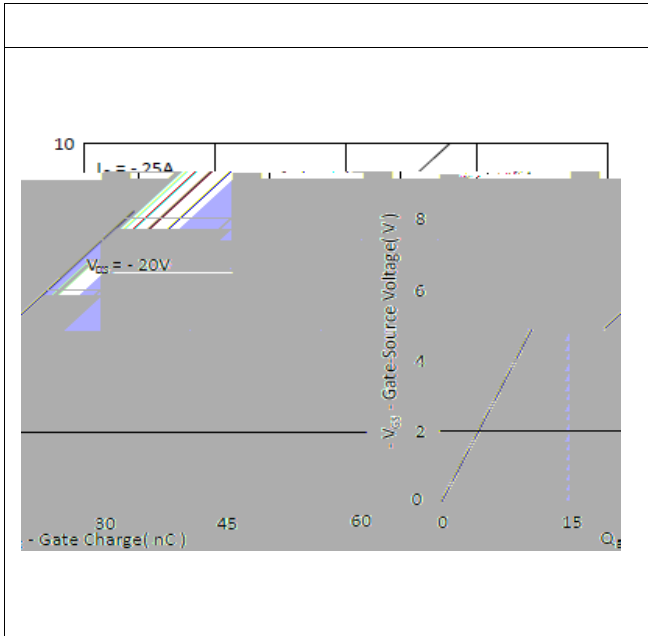

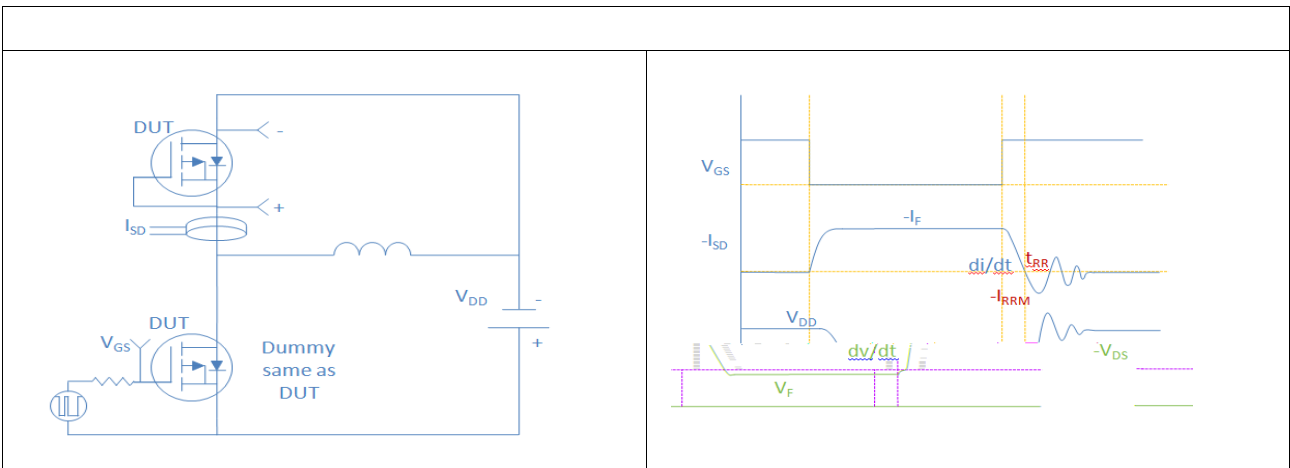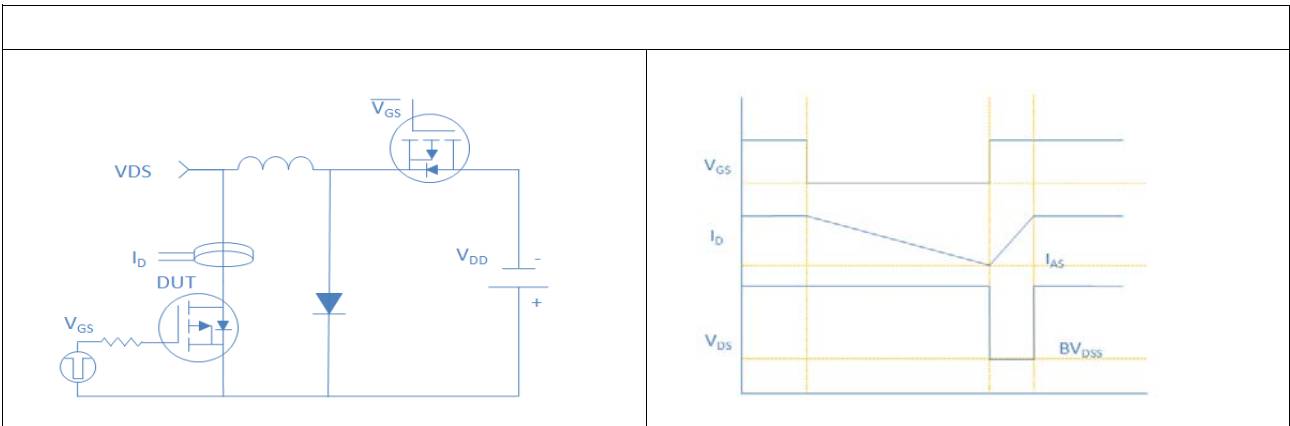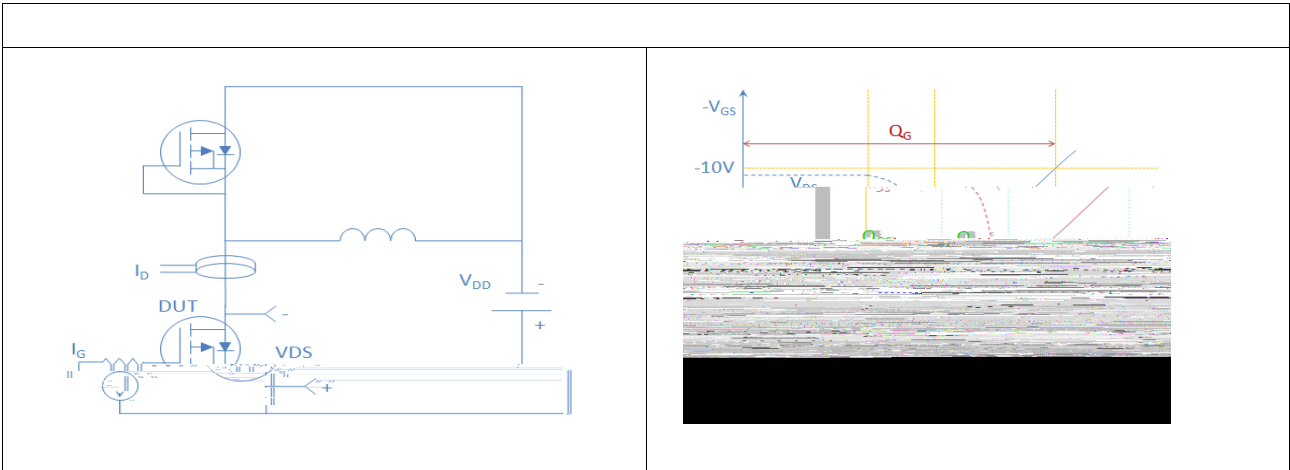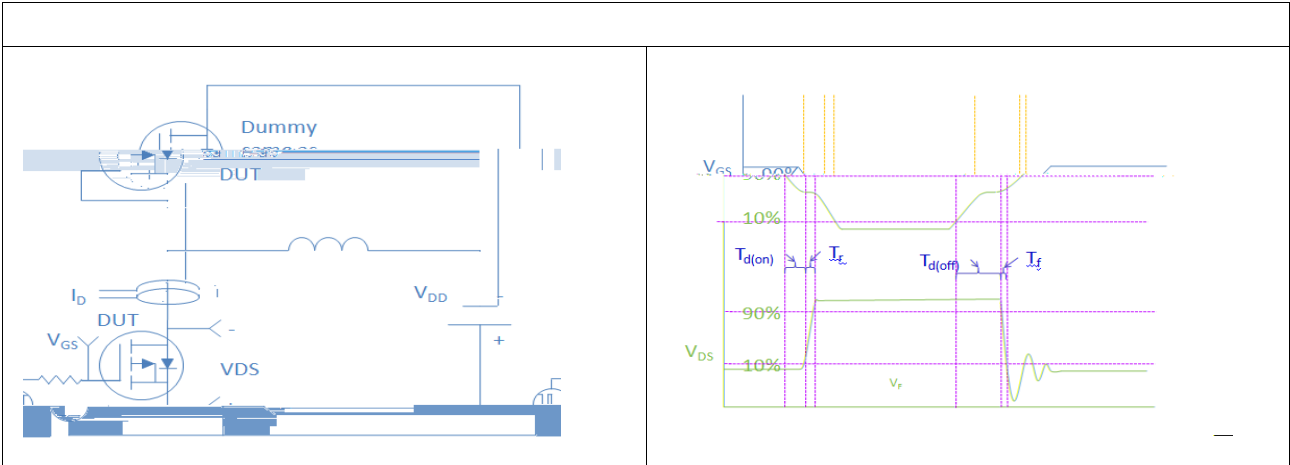

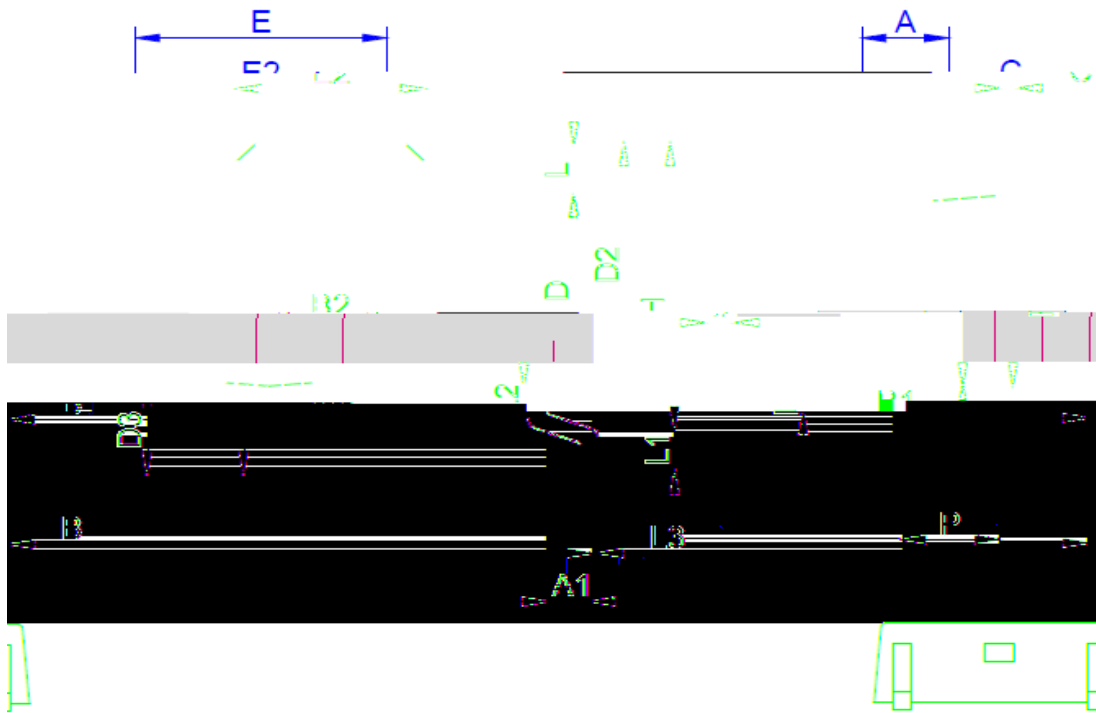

Dimension	A	A1	B	B1	B2	C	D	D2	D3	E	E2	H	L	L1	L2	L3	P
Min.	2.10	0.95	0.30	0.40	0.60	0.40	5.30	6.70	2.20	6.40	4.80	9.20	0.89	0.90	0.50	0.00	2.10
Max.	2.50	1.25	0.45	0.60	1.00	0.60	6.00	7.00	3.00	7.00	6.00	10.15	1.00	1.00	0.60	0.00	2.50