





Feature

- High Speed Power Switching, Logic Level
- Enhanced Avalanche Ruggedness
- Lead Free, Halogen Free







Application






- Hard Switching and High Speed Circuit
- BLDC motor





SOIC-8

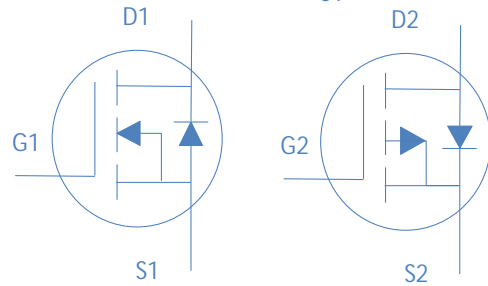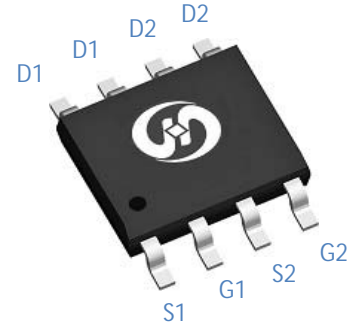









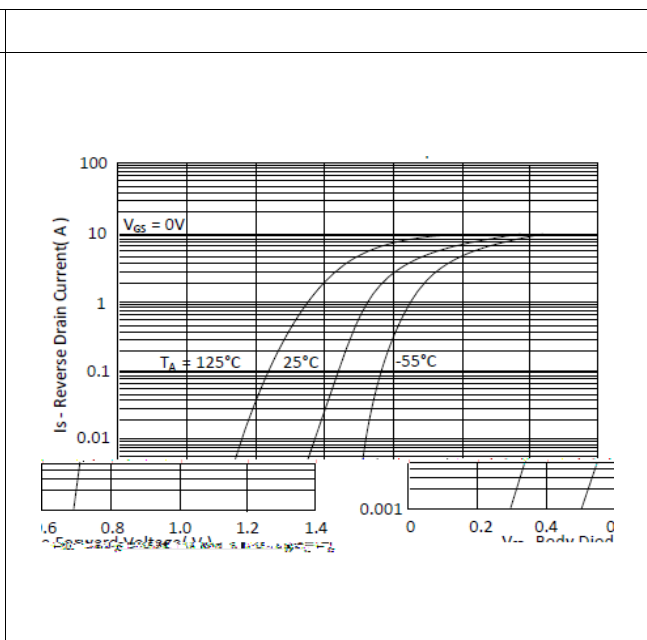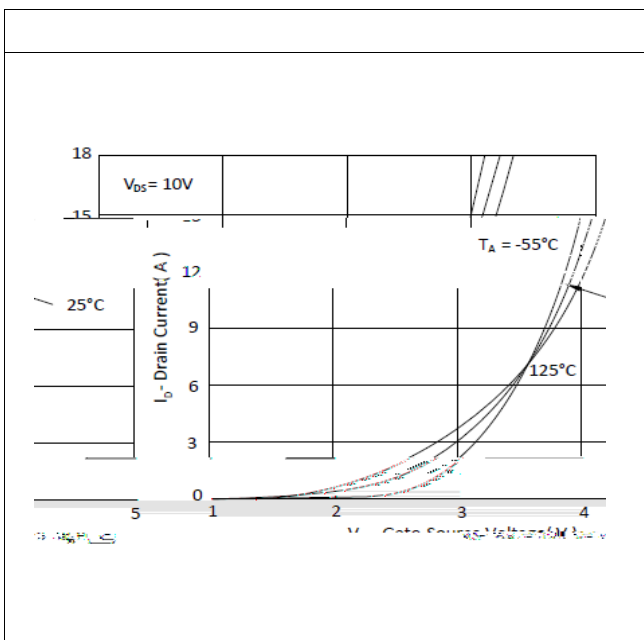
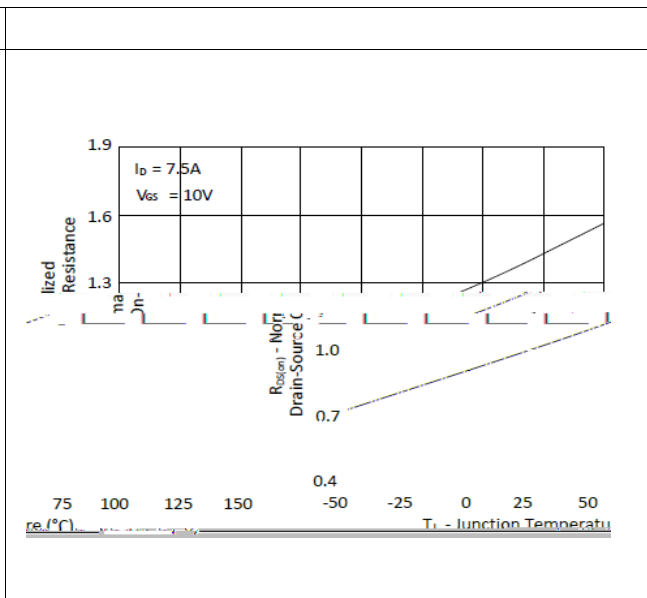
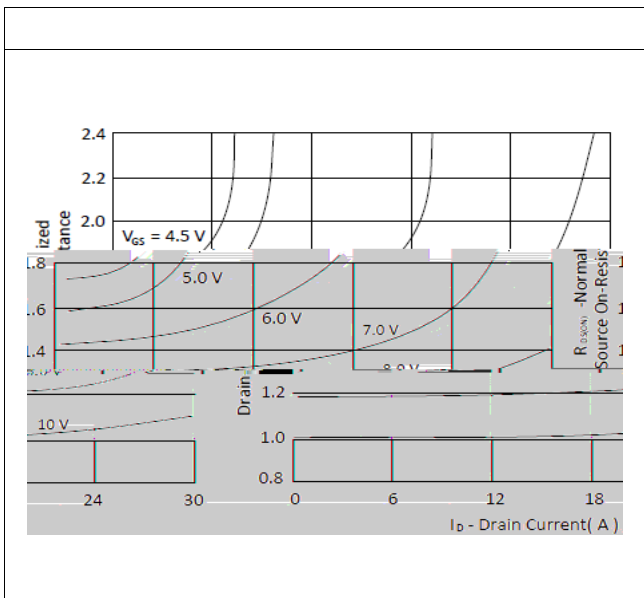
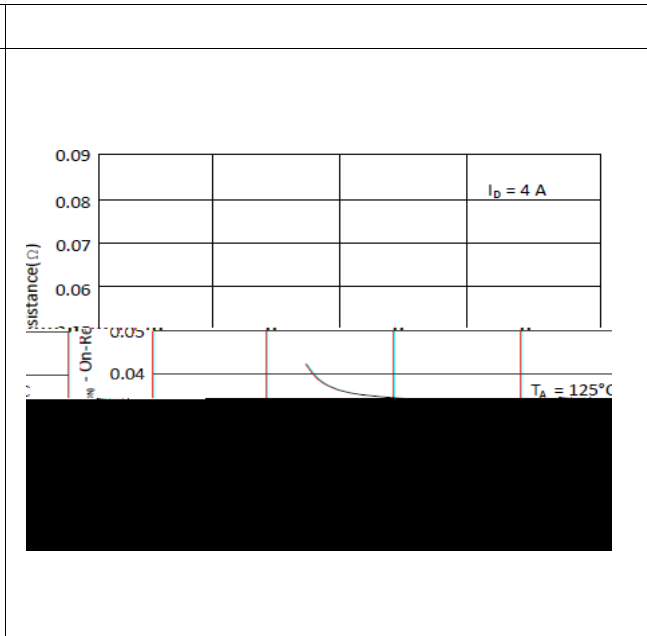
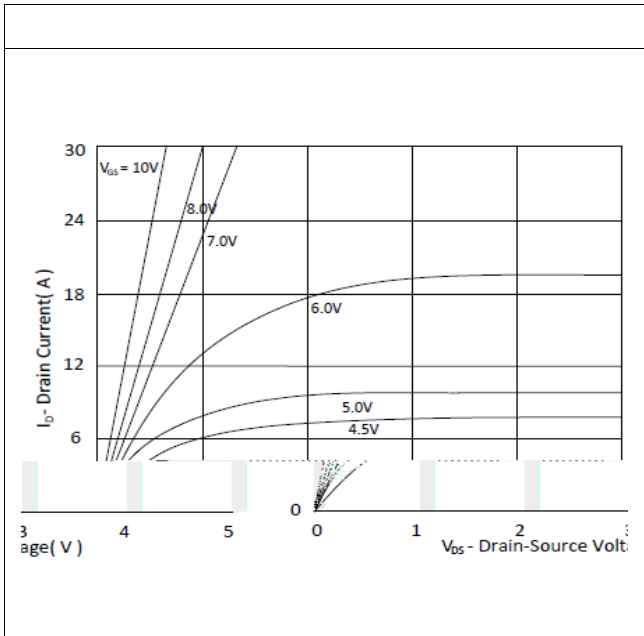


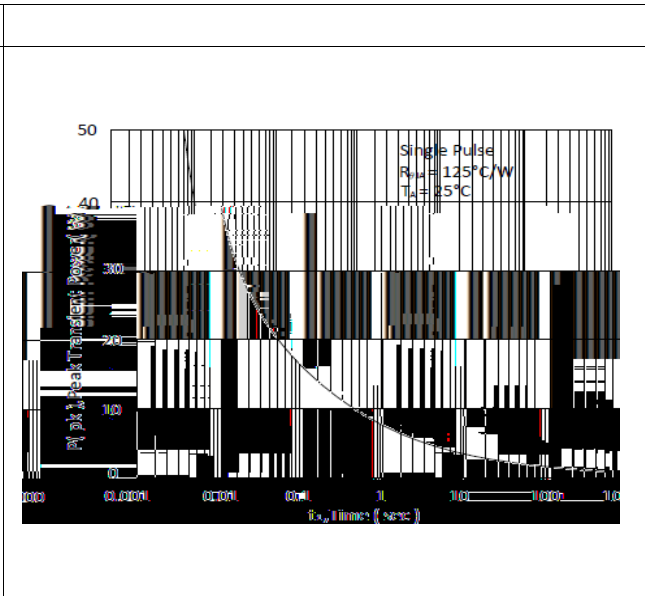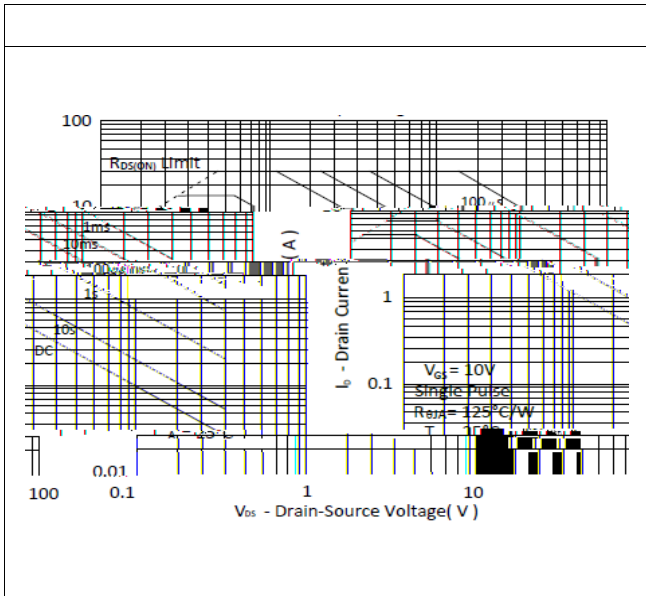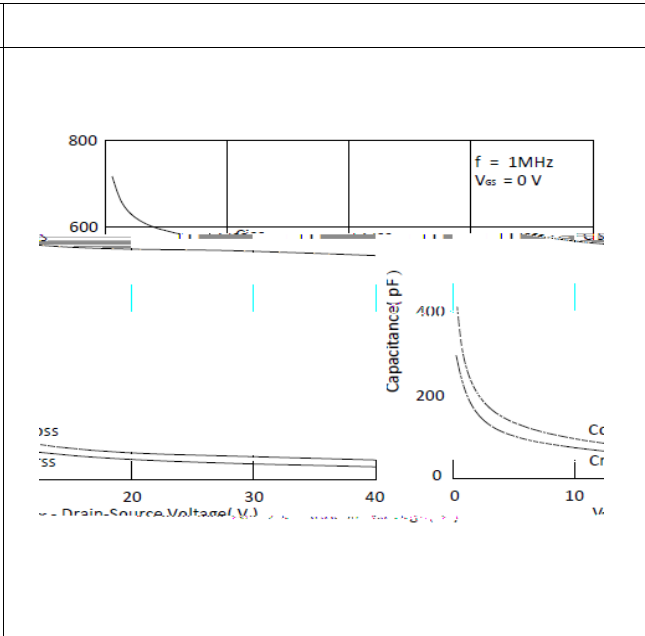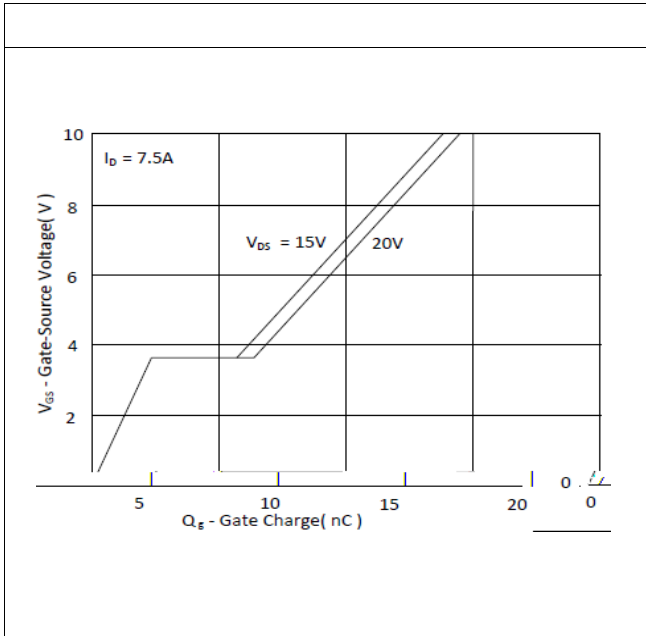


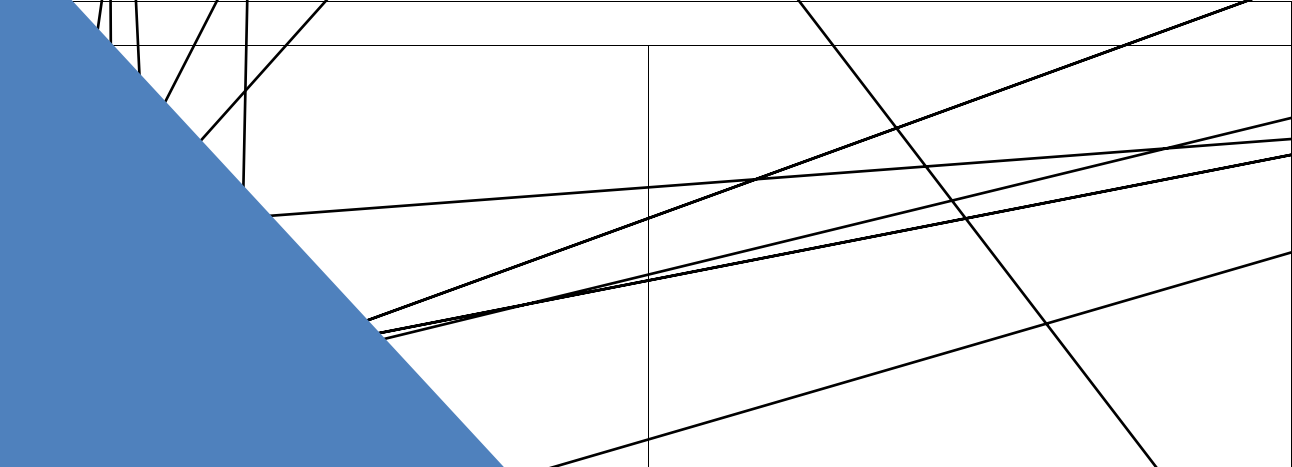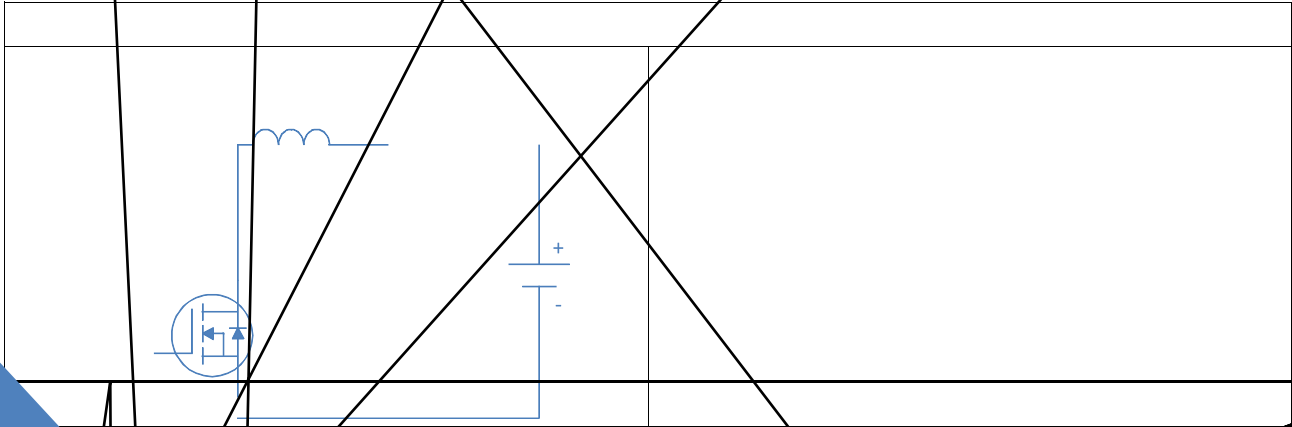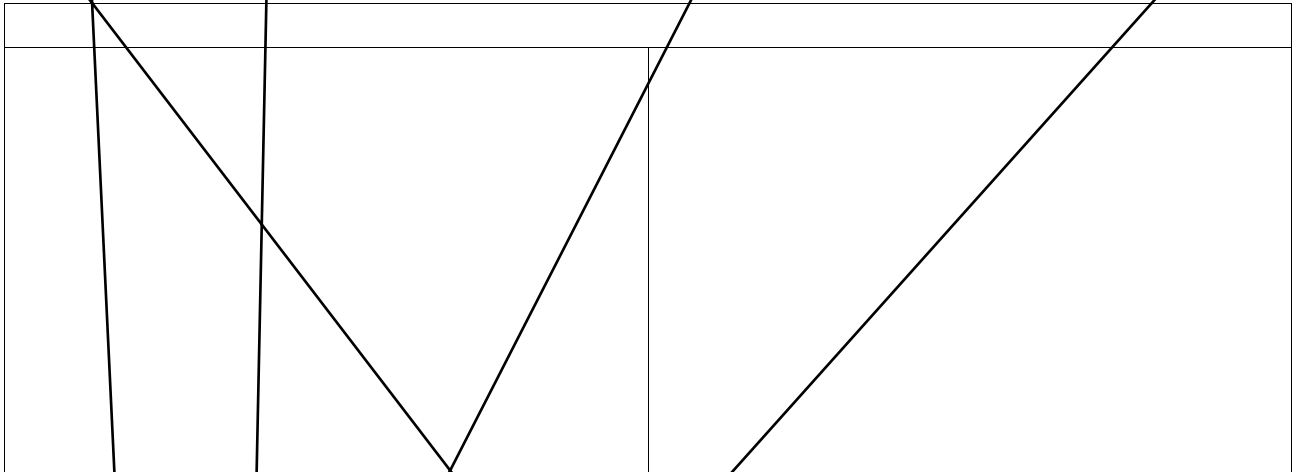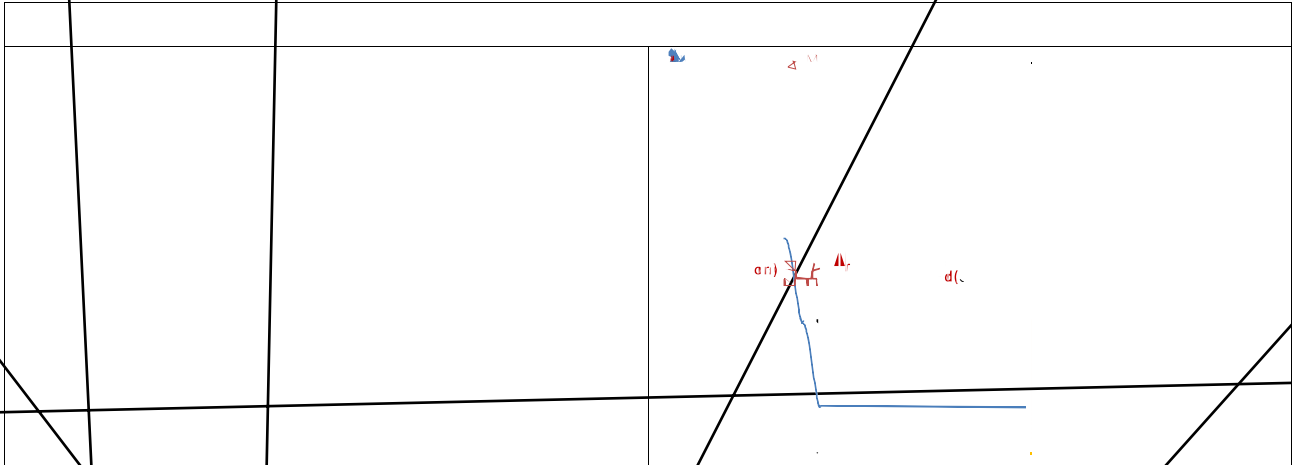



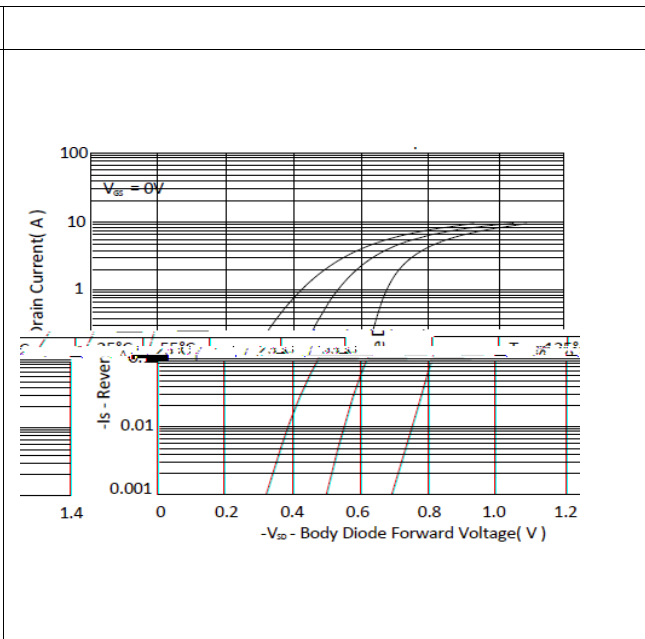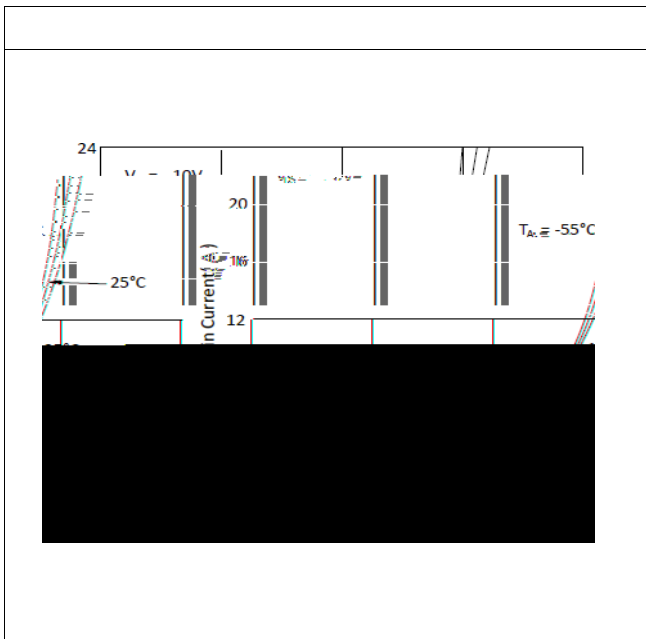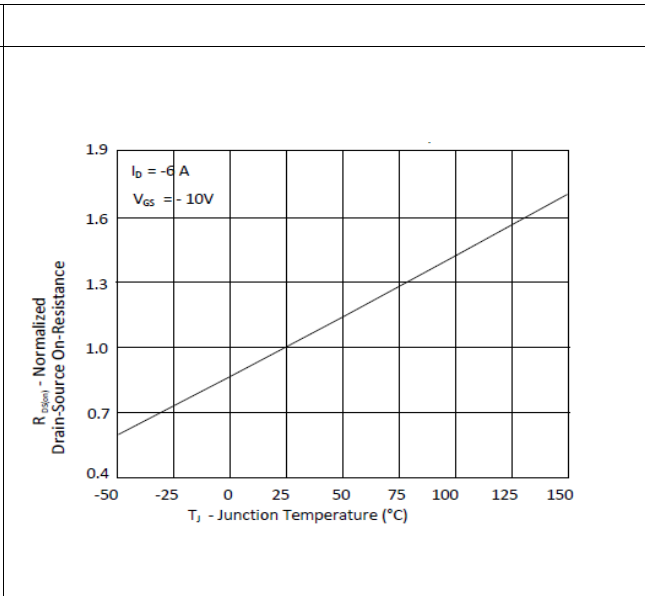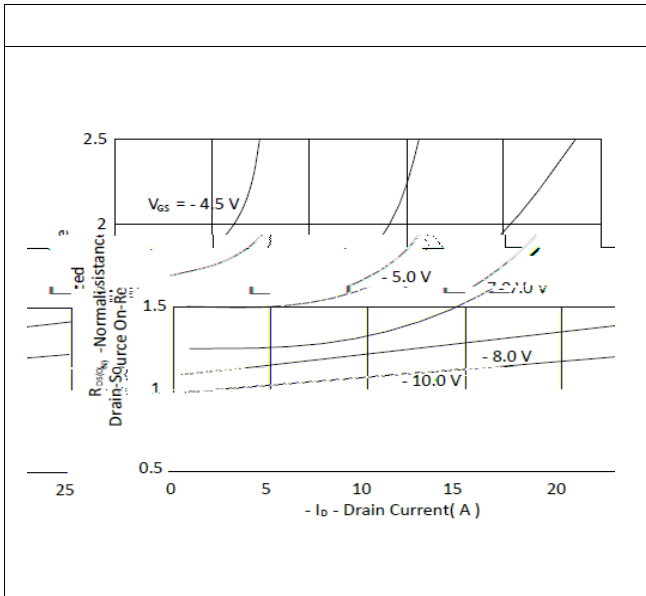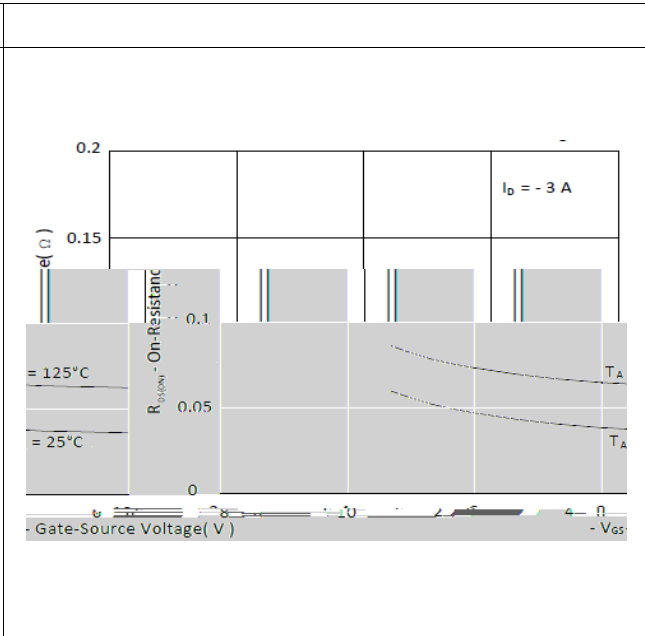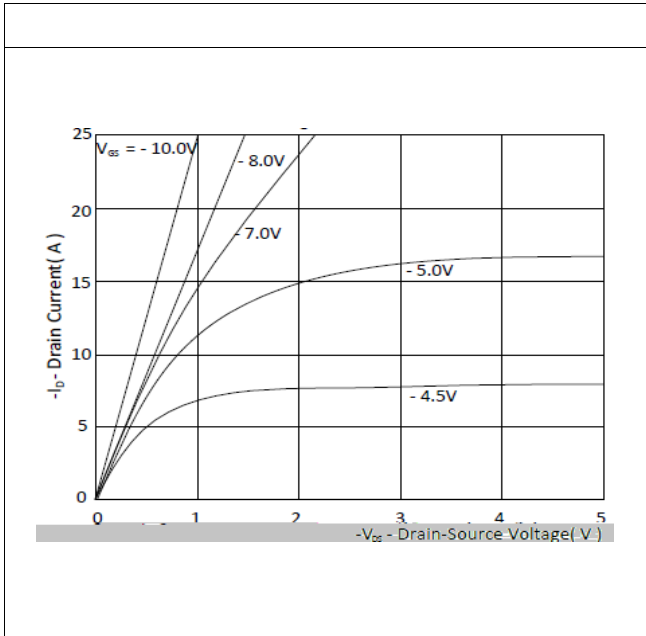

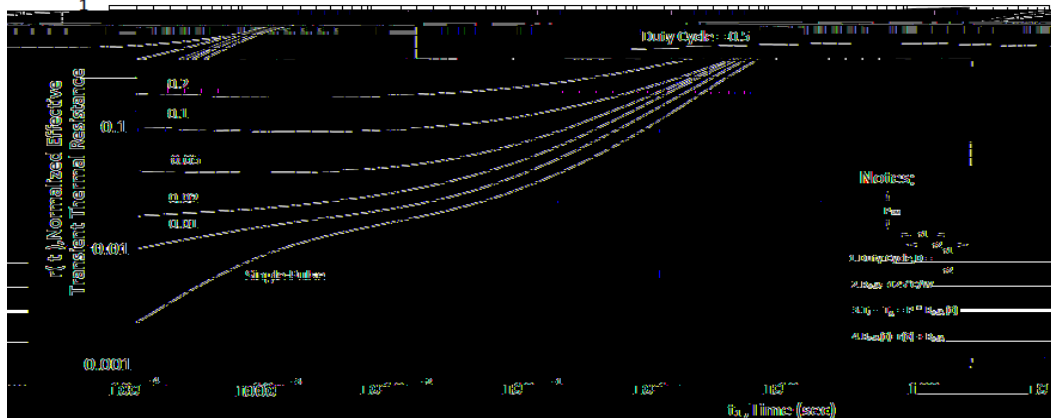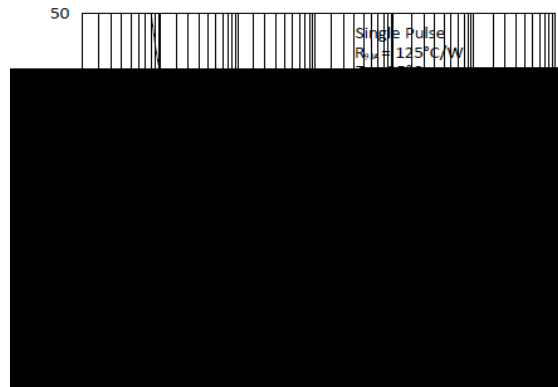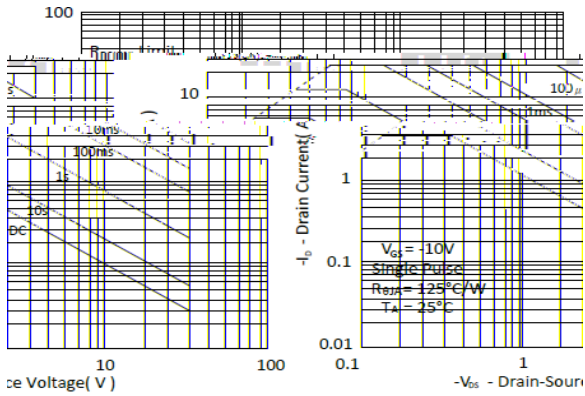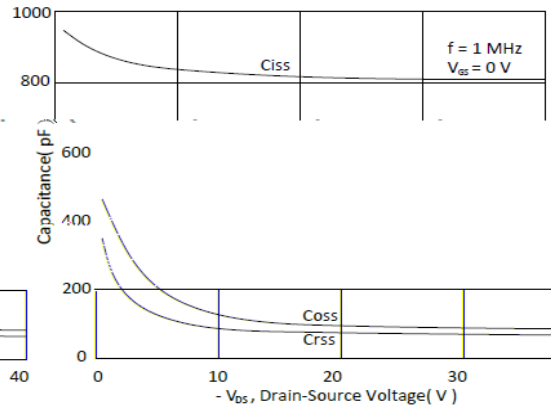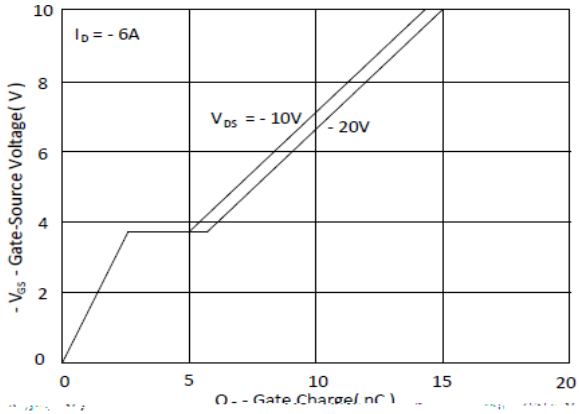

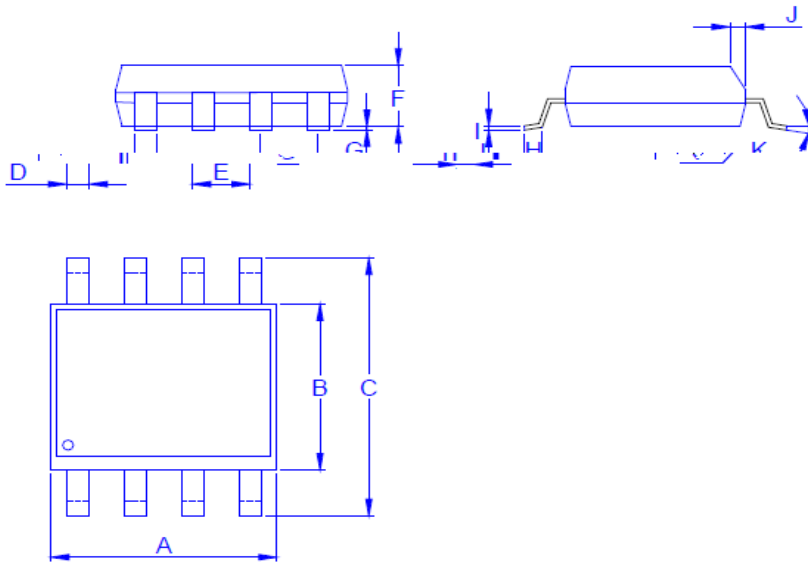

Dimension in mm

Dimension	A	B	C	D	E	F	G	H	I	J	K
Min.	4.70	3.70	5.80	0.33		1.20	0.08	0.40	0.19	0.25	0°
Typ.					1.27						
Max.	5.10	4.10	6.20	0.51		1.62	0.28	0.83	0.26	0.50	8°